



Rec'd PCT/PTO 04 FEB 2003
PCT/GB 2003 / 0 0 3 7 3 7



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 23 OCT 2003

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

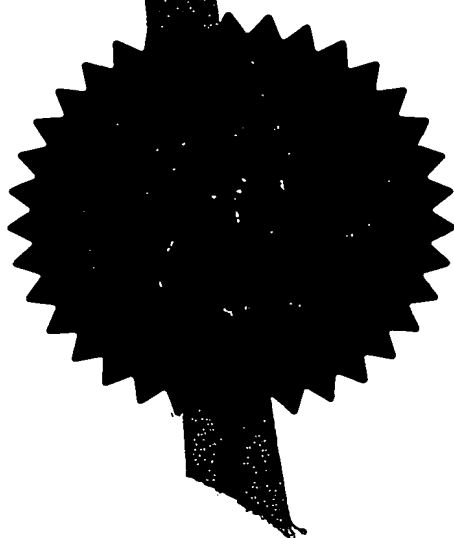

Signed

Dated 25 September 2003

- 2 SEP 2002

02SEP02 ET/5048-1/002776
P017700 0.00-0220274.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference IP/P7199

2. Patent application number 0220274.5
(The Patent Office will fill in this part) 2 SEP 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames) QINETIQ LIMITED
Registered Office 85 Buckingham Gate
London SW1E 6PD
United Kingdom

Patents ADP number (if you know it) GB 8183857001
If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention Packaging Method

5. Name of your agent (if you have one) Philip Davies 'et al'

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) QINETIQ LIMITED
IP Formalities
A4 Bldg
Cody Technology Park
Ively Road
Farnborough
Hants GU14 0LX United Kingdom

Patents ADP number (if you know it) 8183873001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)) YES (b)

9. Enter the number of sheets for each of the following items you are filing on this form. Do not count copies of the same document.

Continuation sheets of this form

Description	13
Claim(s)	6
Abstract	1
Drawing(s)	4 only

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

7 /

Request for preliminary examination and search (Patents Form 9/77)

1 /

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

CF

11. I / We request the grant of a patent on the basis of this application.

Signature

P. Davies
Philip Davies

Date
2.9.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Linda Bruckshaw 01252 392722

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500503.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

- 1 -

HERMETIC PACKAGING

The present invention relates to hermetic packaging and in particular to an hermetically sealed enclosure and a method for forming said enclosure. The invention
5 has particular relevance to hermetically sealed enclosures for electronic devices.

Many electronic devices must be packaged in an hermetic (airtight) enclosure in order to maintain correct operation. Furthermore, in many cases, there is a requirement for the package to be evacuated to a low pressure. Examples of such vacuum packaged
10 devices include movable micromirror arrays, micromachined inertial sensors (accelerometers and gyroscopes), microbolometer arrays, gas sensors and absolute pressure sensors.

Hermetic packaging requires that a sealing step be performed under a controlled
15 atmosphere, usually of an inert gas such as nitrogen or argon. As mentioned above, there may be an additional requirement for the package to be evacuated to a low pressure.

Outgassing during the sealing processes can introduce contaminants into the
20 controlled atmosphere within the enclosure, which can be of particular concern for high purity hermetic enclosures. In many cases the sealing process itself can be a significant source of outgassing, which degrades the vacuum level achieved and can introduce a variety of contaminants. Moreover, outgassing is invariably exacerbated if the sealing process includes a heating process.

25 Conventional sealing processes are often performed at elevated temperatures. This is often the highest temperature the device can withstand and hence is a higher temperature than the device has encountered elsewhere in the bake-out process. This leads to outgassing occurring from all elements of the package and during the
30 sealing process, hence degrading the vacuum level and introducing contaminants into the atmosphere.

An additional problem of sealing at elevated temperatures is the stress formed in the seal during cooling due to the differential thermal expansion coefficients of the
35 materials involved.

- 2 -

Automation of such sealing processes can also be complex and expensive due to the requirements for vacuum, temperature control, alignment and other processing parameters. Alternative sealing methods in which the inside of an enclosure is evacuated and then the enclosure is sealed by closure of a valve or exhaust tube
6 require additional parts and processing steps for the sealing process and tend to be subject to either poor hermeticity, high cost or outgassing during a heating process in the sealing step.

10 It is an object of the present invention to mitigate at least some of the disadvantages of the above packaging methods, and to provide a simplified hermetic packaging method and hermetically sealed enclosure. It is a further object of the present invention to provide an hermetic packaging method in which the temperature of the heating process is minimised or which obviates heating.

- 3 -

According to a first aspect of the present invention, a method of hermetically packaging an electronic device, in an enclosure comprising mutually inter-engageable first and second housing members, comprises the steps of

5 (i) securing the electronic device to the first housing member,

(ii) engaging the first and second housing members such that an hermetic seal is provided there between,

10 wherein the engagement step is performed in a controlled atmosphere.

The method provides a simple and cost effective sealing procedure for hermetically packaging the electronic device. Furthermore, the sealing step reduces contamination of the controlled atmosphere and reduces outgassing. Where the controlled
15 atmosphere comprises a vacuum, degradation of the vacuum during sealing is reduced.

In a preferred embodiment, the first housing member comprises a base portion, to which the electronic device is secured during the securing step, and an engagement
20 portion adapted to engage with the second housing member, and wherein the method further comprises the step of attaching the base portion to the engagement portion prior to engaging the first and second housing members.

The step of attaching the base portion of the first housing member to the engagement
25 portion does not need to be performed in an inert atmosphere or a vacuum, as it would be in a conventional vacuum assembly process. Accordingly, a wider range of processes can be used to package the electronic device and hence the assembly cost can be reduced.

30 In another preferred embodiment, the first and second housing members are adapted to inter-engage to form an interference fit there between, said interference fit providing the hermetic seal.

Alternatively, the enclosure further comprises sealing means interposed between the
35 first and second housing members, said sealing means providing the hermetic seal.

- 4 -

The sealing means may comprise at least one of a metal, a eutectic alloy, an elastomer and an adhesive. For example, the sealing means comprise an indium seal or a compressible elastomeric ring.

- 5 Conveniently, the method further comprises the intermediate step of applying the sealing means to least one of the first and second housing members prior to engaging the first and second housing members.

- Advantageously, the enclosure further comprises spacer means disposed adjacent
10 the sealing means so as to preclude over-compression of the sealing means during the engagement step. Additionally, or alternatively, the enclosure comprises retaining means disposed adjacent the sealing means so as to retain the sealing means.

- In a preferred embodiment, the second housing member comprises a first
15 substantially transmissive optical element and an engagement portion adapted to engage with the first housing member.

- Where enclosure comprises sealing means, the hermetic seal may be provided
between the first housing member and the first optical element via said sealing
20 means.

In another preferred embodiment, the second housing member is adapted to receive a second substantially transmissive optical element.

- 25 Advantageously, the controlled atmosphere comprises an inert gas. The inert gas may comprise at least one of nitrogen and argon.

Preferably, the controlled atmosphere comprises a vacuum.

- 30 The step of engaging the first and second housing members may include the step of bonding said housing members. The bonding step may comprise one of friction welding and friction soldering.

- Conveniently, the first and second housing members comprise metal cylinders having
35 a substantially circular cross section.

- 5 -

According to a second aspect of the present invention there is now proposed an electronic device comprising an electronic element, a first housing member, and a second housing member, the first and second housing members having an engagement hermetic seal there between so as to define around the electronic
5 element an hermetic enclosure having a controlled atmosphere within.

According to a third aspect of the present invention there is now proposed an electronic device comprising an electronic element, a first housing member, and a second housing member, the first and second housing members defining an hermetic
10 enclosure,

wherein the electronic element is located within the hermetic enclosure and wherein the hermetic enclosure is formed by engaging the first and second housing members in a controlled atmosphere such that an engagement hermetic seal is provided there
15 between.

The above electronic devices are advantageous in that they utilise a simple and cost effective hermetic seal. Furthermore, the hermetic seal reduces contamination of the controlled atmosphere and reduces outgassing during the sealing process. Where the
20 controlled atmosphere comprises a vacuum, degradation of the vacuum during sealing is reduced.

In a preferred embodiment of the second or third aspect of the present invention, the engagement hermetic seal comprises an interference seal between the first and
25 second housing members.

In another embodiment of the second or third aspect of the present invention, the engagement hermetic seal comprises a friction weld between the first and second housing members.
30

Preferably, the electronic device according to the second or third aspect of the present invention further comprising sealing means interposed between the first and second housing members, said sealing means providing the engagement hermetic seal. Conveniently, the first and second housing members may be held in
35 engagement by an interference fit there between.

- 6 -

In a preferred embodiment of the second or third aspect of the present invention, the sealing means comprise at least one of a metal, a eutectic alloy, an elastomer and an adhesive. For example, the sealing means comprise an indium seal or a compressible elastomeric ring.

5

In another preferred embodiment of the second or third aspect of the present invention, the enclosure further comprises spacer means disposed adjacent the sealing means so as to preclude over-compression of the sealing means. The enclosure may comprise retaining means disposed adjacent the sealing means so as to retain the sealing means.

10

In a further preferred embodiment of the second or third aspect of the present invention, the second housing member comprises a first substantially transmissive optical element and an engagement portion adapted to engage with the first housing member.

15

The first optical element may comprise a lens. Advantageously, the first optical element comprises at least one of chalcogenide glass, silicon and germanium.

Where the electronic device according to the second or third aspect of the present invention comprising sealing means, the engagement hermetic seal may be provided between the first housing member and the first optical element via the sealing means.

20

In another preferred embodiment of the second or third aspects of the present invention, the second housing member includes a second substantially transmissive optical element. The second optical element may comprises chalcogenide glass.

25

In a further preferred embodiment of the second or third aspects of the present invention, the controlled atmosphere comprises an inert gas. The inert gas may comprise at least one of nitrogen and argon. Preferably, the controlled atmosphere comprises a vacuum.

30

According to a fourth aspect of the present invention, there is now proposed a thermal detector housed within an hermetic enclosure comprising mutually inter-engaged first and second housing members, the second housing member comprising a first

35

- 7 -

substantially transmissive optical element; wherein said housing members enclose the thermal detector within a controlled atmosphere and provide an hermetic seal around said thermal detector.

- 5 In a preferred embodiment, the first and second housing members form an interference fit there between, said interference fit providing the hermetic seal.

In another preferred embodiment, the enclosure further comprises sealing means interposed between the first and second housing members, said sealing means
10 providing the hermetic seal.

Conveniently, the sealing means comprise at least one of a metal, a eutectic alloy, an elastomer and an adhesive. For example, sealing means may comprise an Indium seal or a compressible elastomeric ring.

15

Advantageously, the first optical element comprises a lens. The first optical element may comprises at least one of chalcogenide glass, silicon and germanium.

Where the enclosure comprises sealing means, the hermetic seal may be provided
20 between the first housing member and the first optical element via the sealing means.

In a further preferred embodiment, the second housing member includes a second substantially transmissive optical element. Advantageously, the second optical element comprises chalcogenide glass.

25

In a preferred embodiment, the controlled atmosphere comprises an inert gas. The inert gas may comprise at least one of nitrogen and argon.

Advantageously, the controlled atmosphere comprises a vacuum.

30

- 8 -

The invention will now be described, by example only, with reference to the accompanying drawings in which;

Figure 1 shows a schematic cross sectional representation of an hermetic enclosure
5 according to the present invention,

Figure 2 shows a cut-away schematic representation of an hermetic enclosure according to the present invention,

10 Figure 3 shows an exploded schematic representation of an hermetic enclosure according to the present invention,

Figure 4 shows a schematic cross sectional representation of an alternative hermetic enclosure according to the present invention.
15

- 9 -

Referring to figure 1, an hermetically sealed enclosure (2) according to one embodiment of the present invention comprises a first housing member (4) and a second housing member (6) which together enclose an electronic device (8) disposed within said housing members. The housing members (4, 6) are arranged such that they fit together to form an hermetic seal around the electronic device. In practice the housing members (4, 6) may comprise inter-engageable cylinders. In figure 1, the second housing member (6) has a closed end to provide a lid for the hermetic enclosure. Figure 1 shows the first housing member (4) attached to a separate base (10). However, a separate base is not required if the first housing member (4) is closed cylinder, in which case the base (10) is integral to the first housing member (4). In practice, the cylinders may be fabricated from metal, ceramic, glass, plastic or any other suitable material. In particular, the cylinders may exhibit a substantially circular cross section.

The electronic device (8) is disposed on a base (10) and connected to external connections (12) via feedthroughs (14) on the base (10). The feedthroughs (14) may comprise conventional glass-to-metal feedthroughs.

The first and second housing members (4, 6) may be arranged such that they fit together to form an interference fit, thereby providing an hermetic seal around the electronic device. Alternatively, or in addition, a seal (16) may be disposed between the first housing member (4) and the second housing member (6). The seal (16) provides a continuous, airtight connection between the two housing members (4, 6).

In practice, the seal (16) may be a ring of soft metal such as indium located on the top surface of the first housing member (4). The seal (16) may be accompanied by one or more additional ring (18) which acts as a spacer layer to prevent over-compression of the seal. Additionally, or alternatively, the ring (18) may act as a dam to prevent the escape of the sealing material (16).

The additional ring (18) which acts as the spacer and/or dam features can also be designed into the shape of the housing member (4, 6), thus reducing the number of components and assembly steps. Location features may also be included to ease assembly.

- 10 -

Other sealing materials can be used, for example other soft metals, solders and eutectic alloys, as well as rubber seals and glues. For example, an adhesive could be applied outside of the seal (16) to add mechanical strength to the seal (16). In principle, the seal material could be added in vacuum, for example by vacuum evaporation. The sealing ring (16) could also be deposited onto the assembly by an overmoulding process in the case of an elastomeric seal.

The hermetic enclosure is fabricated as follows. The electronic device (8) is attached to the base (10) (for example, a transistor can header such as a TO-5 or a TO-8 header) by industry standard processes. Any conventional low-outgassing die attach methods may be used. If required, the electrical connections are then bonded to the feedthroughs (14) (for example, glass-to-metal feedthroughs) on the base (10), also in a standard manner. The first housing member (4), comprising a metal cylinder in this instance, is attached to the base (10). The metal cylinder may be formed by drawing, punching or machining processes. Additional features, such as alignment features or a lip to provide a reduced aperture may be used on this part in order to assemble the part with a second housing member (6) of the required geometry.

The metal cylinder (4) may be attached by welding, soldering, gluing, crimping or other attachment processes, which can be selected for their cost and hermeticity properties. In the case of welding, resistance welding, electron-beam welding, laser welding, or other welding processes can be used as appropriate for the size and geometry of the package.

The fact that this process is not performed in an inert atmosphere or a vacuum, as it would be in a conventional metal can vacuum assembly process, means that a wider range of processes can be used and the assembly cost can be reduced. Whilst the above step does not require an inert atmosphere or a vacuum, it may be desirable to fabricate the hermetic enclosure and attach the electronic device under clean-room conditions to avoid particulate contamination of the device. This sub-assembly, along with the other package components, can then be stored in under controlled conditions, at an elevated temperature until required. This reduces the need for time-consuming bake-out processes at the time of assembly.

- 11 -

The next assembly step is performed under a controlled atmosphere. The controlled atmosphere may comprise an inert gas, for example nitrogen or argon. Additionally, or alternatively, the controlled atmosphere may comprise a vacuum. Herein, the term vacuum shall refer to a decrease of pressure below normal ambient atmospheric pressure. Note that the controlled atmosphere under which this next assembly step is performed is not merely a clean-room environment as used above for fabricating the hermetic enclosure.

The second housing member (6) is pressed down onto the seal (16), in this case an Indium sealing ring. Location features allow this assembly process to be performed with high accuracy and at low cost.

The second housing member (6) may be designed to slide over the first housing member (4), or vice versa, and to form an interference fit therewith. In this case, no additional means are required to hold the enclosure together.

The interference fit itself may be used to provide a seal in this case. Alternatively, where the housing members (4, 6) comprise metal cylinders, the second housing member (6) may be heated prior to assembly and allowed to cool and contract over the first housing member (4), thus improving the seal. Alternatively, where the housing members (4, 6) comprise metal cylinders, the friction due to the second housing member (6) being moved over the first housing member (4) can be used to produce heating and produce a friction welded seal or to melt a pre-placed mass of solder, referred to herein as frictional soldering.

In a preferred implementation the seal (16) consists of indium solder, although, as mentioned above, other sealing methods can be used.

The above method of forming the hermetic enclosure is advantageous in that only an alignment and compression operation must be performed under a controlled atmosphere, thus simplifying the manufacture. The low part count and simple assembly procedure enables a very low cost hermetic enclosure to be manufactured. Furthermore, the fabrication process uses a low temperature sealing step, which has several advantages. Firstly, there is no outgassing during the sealing step. Secondly,

- 12 -

materials of differing thermal expansion coefficients can be joined. Thirdly, materials subject to damage by heating or thermal shock can be joined.

Where the enclosure is evacuated to a low pressure, getters may be included in the package to remove gases which accumulate due to leakage or outgassing over a period of several years, thereby maintaining a high level of vacuum over a long period of time.

Referring now to Figure 2, the second housing member (6) may perform additional functions, such as providing an aperture for electromagnetic radiation to enter or leave. Alternatively, the second housing member (6) may hold one or more additional optical components in place.

In this embodiment of the present invention, the second housing member (6) comprises an optical element (20) providing a window or lens to transmit electromagnetic radiation in a preferred frequency range. For example, the optical element (20) may take the form of an infra-red window or lens made from a chalcogenide glass material such as the one of the AMTIR materials manufactured by Amorphous Materials or one of the GASIR material manufactured by Umicore. These lenses have the advantage of low manufacturing cost. Alternatively, the optical element (20) may take the form of an Infra-red window or lens made from silicon or germanium.

The optical element (20) may be metallised at the edges to enable a wider range of vacuum sealing processes, for example soldering processes. In the case of metallised optical element (20), a soldering process may be used to attach the optical element (20) to the second housing member (6) prior to assembling the first and second housing members (4, 6) as described above. Alternatively, or in addition, a low temperature soldering process may be incorporated into the sealing steps performed in a controlled atmosphere. The soldering process creates negligible outgassing and so may be used without compromising the purity of the controlled atmosphere within the hermetic enclosure (2) or the level of the vacuum therein.

- 13 -

This versatility with regard to the choice of sealing processes makes the invention useful in a wide range of applications, since the sealing process can be selected in order to obtain the required hermeticity for a given application.

- 5 Figure 3 shows an exploded schematic representation of an hermetic enclosure according to the present invention. Elements in common with figures 1 and 2 are given like reference numerals.

- 10 Figure 4 shows an alternative embodiment of the present invention in which the optical element (20) is used in combination with an additional optical element (22). In this case, the first optical element (20) comprises an infrared lens or window made from silicon or germanium. A silicon or germanium window has improved mechanical and thermo-mechanical properties compared to the chalcogenide glass lens.

- 15 The additional optical element (22) may comprise a chalcogenide glass lens glued in an accurately-defined location above the first optical element (20), the location being defined by location feature(s) in the second housing member (6). Hence, the relatively fragile lens (22) is not directly exposed to the vacuum or to other mechanical and thermal stresses which may be involved in the vacuum sealing process. As above, 20 although an indium seal is illustrated in this case, the first optical element (20) may be metallised at the edges to enable a wider range of vacuum sealing processes, for example soldering processes.

- 25 Whilst in the foregoing embodiments the components are largely made of metal, the components may alternatively or additionally be made of ceramic (for example, using a ceramic chip carrier in place of the metal transistor can header), glass, plastic or other suitable materials.

- 30 In particular, the hermetically sealed enclosure of the present invention may be used to house thermal detectors, for example microbolometer arrays.

- 14 -

Claims

1. A method of hermetically packaging an electronic device, in an enclosure comprising mutually inter-engageable first and second housing members,
5 comprising the steps of
- (i) securing the electronic device to the first housing member,
- (ii) engaging the first and second housing members such that an hermetic seal is
10 provided there between,
- wherein the engagement step is performed in a controlled atmosphere.
2. A method according to claim 1 wherein the first housing member comprises a
15 base portion, to which the electronic device is secured during the securing step, and an engagement portion adapted to engage with the second housing member, and wherein the method further comprises the step of attaching the base portion to the engagement portion prior to engaging the first and second housing members.
- 20 3. A method according to claim 1 or 2 wherein the first and second housing members are adapted to inter-engage to form an interference fit there between, said interference fit providing the hermetic seal.
- 25 4. A method according to claim 1 or 2 wherein the enclosure further comprising sealing means interposed between the first and second housing members, said sealing means providing the hermetic seal.
- 30 5. A method according to claim 4 wherein the sealing means comprise at least one of a metal, a eutectic alloy, an elastomer and an adhesive.
6. A method according to claim 5 wherein the sealing means comprise an indium seal.

- 15 -

7. A method according to claim 5 wherein the sealing means comprise a compressible elastomeric ring.
- 5 8. A method according to any of claims 4 - 7 and further comprising the intermediate step of applying the sealing means to least one of the first and second housing members prior to engaging the first and second housing members.
- 10 9. A method according to any of claims 4 - 8 wherein the enclosure further comprises spacer means disposed adjacent the sealing means so as to preclude over-compression of the sealing means during the engagement step.
- 15 10. A method according to any of claims 4 - 9 wherein the enclosure comprises retaining means disposed adjacent the sealing means so as to retain the sealing means.
11. A method according to any of the preceding claims wherein the second housing member comprises a first substantially transmissive optical element and an engagement portion adapted to engage with the first housing member.
- 20 12. A method according to claim 11 when dependent on any of claims 4-10 wherein the hermetic seal is provided between the first housing member and the first optical element via the sealing means.
- 25 13. A method according to claim 11 or 12 wherein the second housing member is adapted to receive a second substantially transmissive optical element.
14. A method according to any of the preceding claims wherein the controlled atmosphere comprises an inert gas.
- 30 15. A method according to claim 14 wherein the inert gas comprises at least one of nitrogen and argon.
- 35 16. A method according to any of the preceding claims wherein the controlled atmosphere comprises a vacuum.

- 16 -

17. A method according to any of the preceding claims wherein the step of engaging the first and second housing members includes the step of bonding said housing members.
- 5 18. A method according to claim 17 wherein the bonding step comprises one of friction welding and friction soldering.
19. A method according to any of the preceding claims wherein the first and second housing members comprise metal cylinders having a substantially circular cross
10 section.
20. A method of hermetically packaging an electronic device substantially as herein before described with reference to figures 1-4 of the accompanying drawings.
- 15 21. An electronic device comprising an electronic element, a first housing member, and a second housing member, the first and second housing members having an engagement hermetic seal there between so as to define around the electronic element an hermetic enclosure having a controlled atmosphere within.
- 20 22. An electronic device comprising an electronic element, a first housing member, and a second housing member, the first and second housing members defining an hermetic enclosure,
- 25 wherein the electronic element is located within the hermetic enclosure and wherein the hermetic enclosure is formed by engaging the first and second housing members in a controlled atmosphere such that an engagement hermetic seal is provided there between.
- 30 23. An electronic device according to claim 21 or 22 wherein the engagement hermetic seal comprises an interference seal between the first and second housing members.
- 35 24. An electronic device according to claim 21 or 22 wherein the engagement hermetic seal comprises a friction weld between the first and second housing members.

- 17 -

25. An electronic device according to claim 21 or 22 and further comprising sealing means interposed between the first and second housing members, said sealing means providing the engagement hermetic seal.
- 5
26. An electronic device according to claim 25 wherein the first and second housing members are held in engagement by an interference fit there between.
27. An electronic device according to claim 25 or 26 wherein the sealing means
- 10 comprise at least one of a metal, a eutectic alloy, an elastomer and an adhesive.
28. An electronic device according to claim 27 wherein the sealing means comprise an indium seal.
- 15 29. An electronic device according to claim 27 wherein the sealing means comprise a compressible elastomeric ring.
30. An electronic device according to any of claims 25 - 29 wherein the enclosure further comprises spacer means disposed adjacent the sealing means so as to
- 20 preclude over-compression of the sealing means.
31. An electronic device according to any of claims 25 - 30 wherein the enclosure comprises retaining means disposed adjacent the sealing means so as to retain the sealing means.
- 25
32. An electronic device according to any of claims 21 - 31 wherein the second housing member comprises a first substantially transmissive optical element and an engagement portion adapted to engage with the first housing member.
- 30 33. An electronic device according to claim 32 wherein the first optical element comprises a lens.
34. An electronic device according to claim 32 or 33 wherein the first optical element comprises at least one of chalcogenide glass, silicon and germanium.
- 35

- 18 -

35. An electronic device according to any of claims 32 – 34 when dependent on any of claims 25 - 31 wherein the engagement hermetic seal is provided between the first housing member and the first optical element via the sealing means.
- 5 36. An electronic device according to any of claims 32 – 35 wherein the second housing member includes a second substantially transmissive optical element.
37. An electronic device according to claim 36 wherein the second optical element comprises chalcogenide glass.
- 10 38. An electronic device according to any of claims 21 - 37 wherein the controlled atmosphere comprises an inert gas.
- 15 39. An electronic device according to claim 38 wherein the inert gas comprises at least one of nitrogen and argon.
40. An electronic device according to any of claims 21 - 39 wherein the controlled atmosphere comprises a vacuum.
- 20 41. A thermal detector housed within an hermetic enclosure comprising mutually inter-engaged first and second housing members, the second housing member comprising a first substantially transmissive optical element; wherein said housing members enclose the thermal detector within a controlled atmosphere and provide an hermetic seal around said thermal detector.
- 25 42. A thermal detector according to claim 41 wherein the first and second housing members form an interference fit there between, said interference fit providing the hermetic seal.
- 30 43. A thermal detector according to claim 41 wherein the enclosure further comprising sealing means interposed between the first and second housing members, said sealing means providing the hermetic seal.
- 35 44. A thermal detector according to claim 43 wherein the sealing means comprise at least one of a metal, a eutectic alloy, an elastomer and an adhesive.

- 19 -

45. A thermal detector according to claim 44 wherein the sealing means comprise an indium seal.
46. A thermal detector according to claim 44 wherein the sealing means comprise a
5 compressible elastomeric ring.
47. A thermal detector according to any of claims 41 - 46 wherein the first optical element comprises a lens.
- 10 48. A thermal detector according to any of claims 41 - 47 wherein the first optical element comprises at least one of chalcogenide glass, silicon and germanium.
49. A thermal detector according to any of claims 43 - 48 wherein the hermetic seal is provided between the first housing member and the first optical element via the
15 sealing means.
50. A thermal detector according to any of claims 43 - 49 wherein the second housing member includes a second substantially transmissive optical element.
- 20 51. A thermal detector according to claim 50 wherein the second optical element comprises chalcogenide glass.
52. A thermal detector according to any of claims 41 - 51 wherein the controlled atmosphere comprises an inert gas.
25
53. A thermal detector according to claim 52 wherein the inert gas comprises at least one of nitrogen and argon.
54. A thermal detector according to any of claims 41 - 53 wherein the controlled
30 atmosphere comprises a vacuum.
55. A thermal detector substantially as herein before described with reference to figures 1-4 of the accompanying drawings.

- 20 -

Abstract

Hermetic Packaging

- 5 A method of hermetically packaging an electronic device (8), in an enclosure (2) comprising mutually inter-engageable first and second housing members (4, 6), comprising the steps of securing the electronic device (8) to the first housing member (4), engaging the first (4) and second (6) housing members such that an hermetic seal is provided there between, wherein the engagement step is performed in a
- 10 controlled atmosphere. The hermetic seal may be provided by an interference fit between the first (4) and second (6) housing members or via sealing means (16) interposed between the housing members (4, 6). The second housing member (6) may comprise an optical element (20), for example a window or lens. The packaging method is particularly applicable to packaging thermal detectors, for example
- 15 microbolometer arrays.

[Figure 1 should accompany the abstract]

- 1/4 -

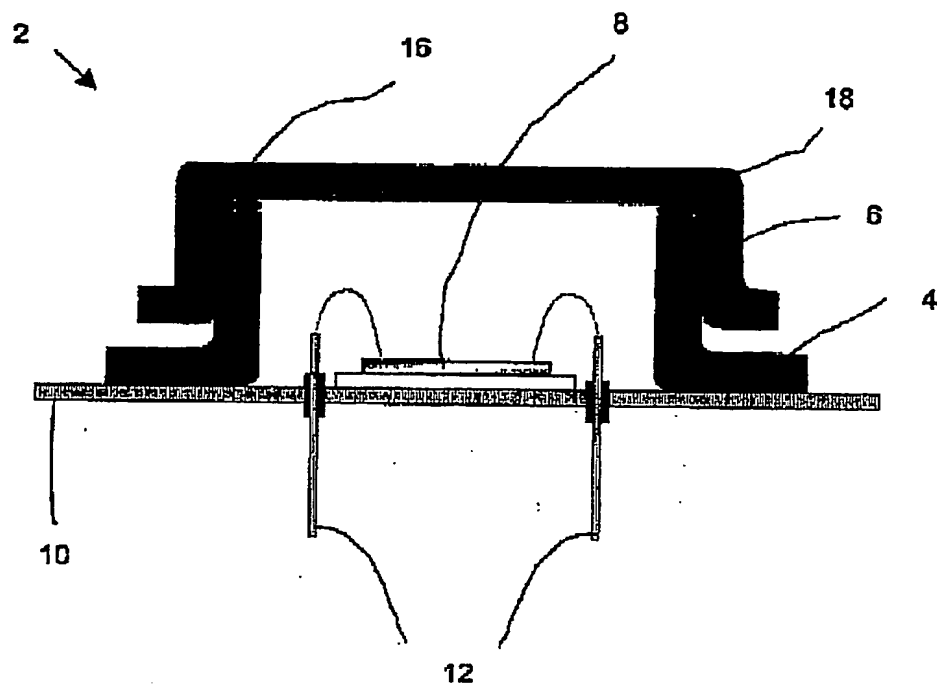


Figure 1

- 2/4 -

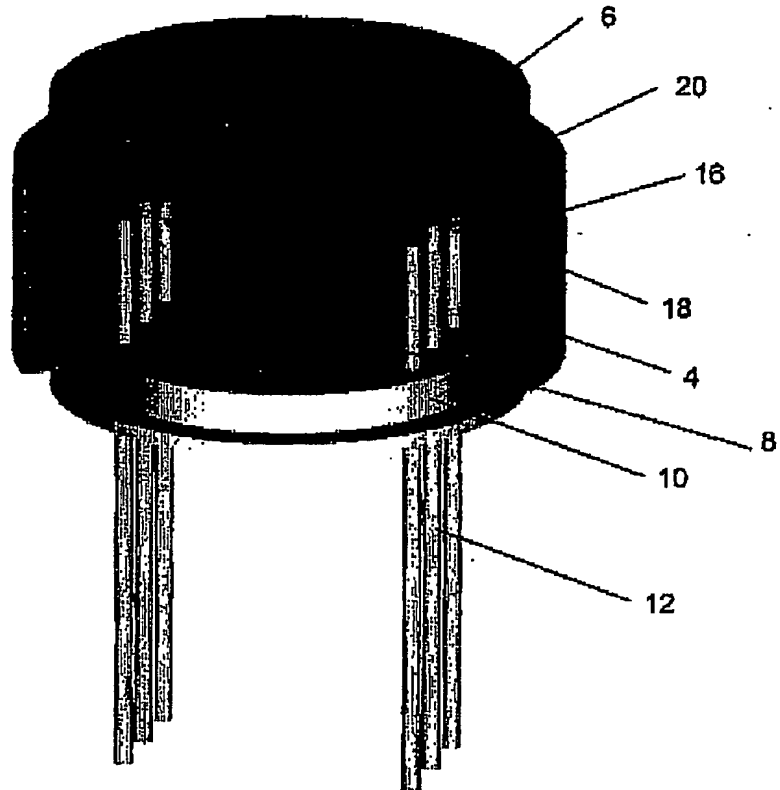


Figure 2

- 3/4 -

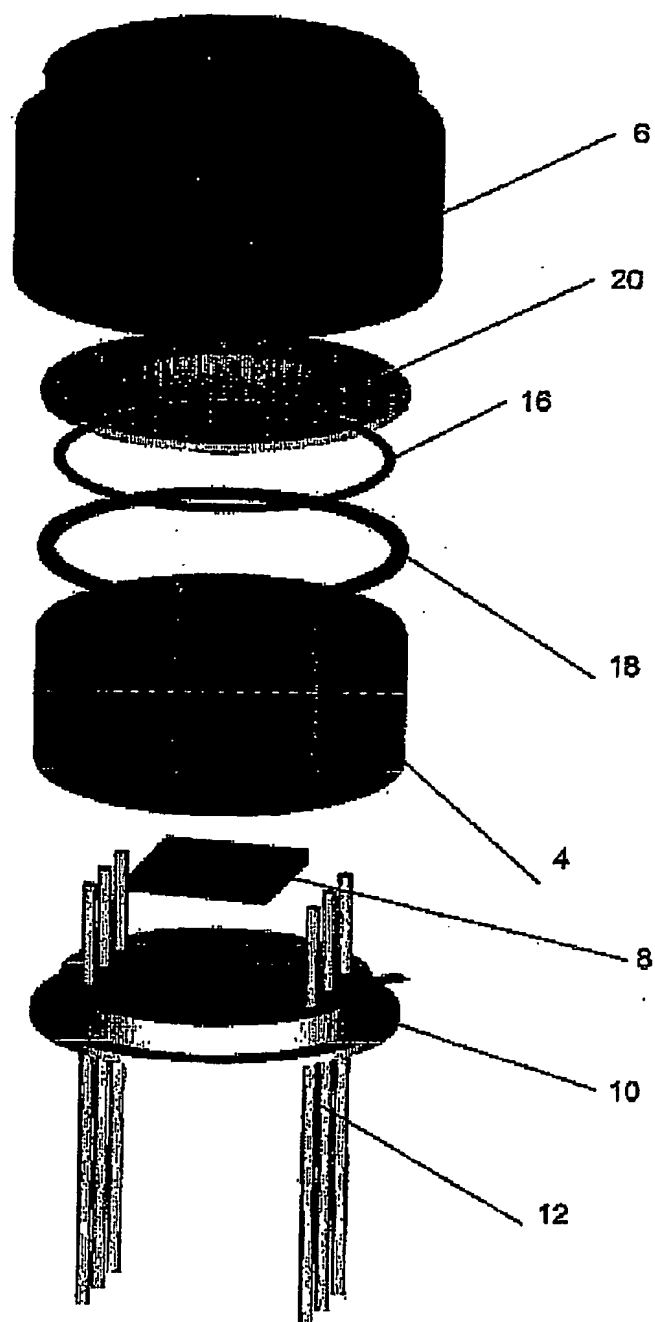


Figure 3

- 4/4 -

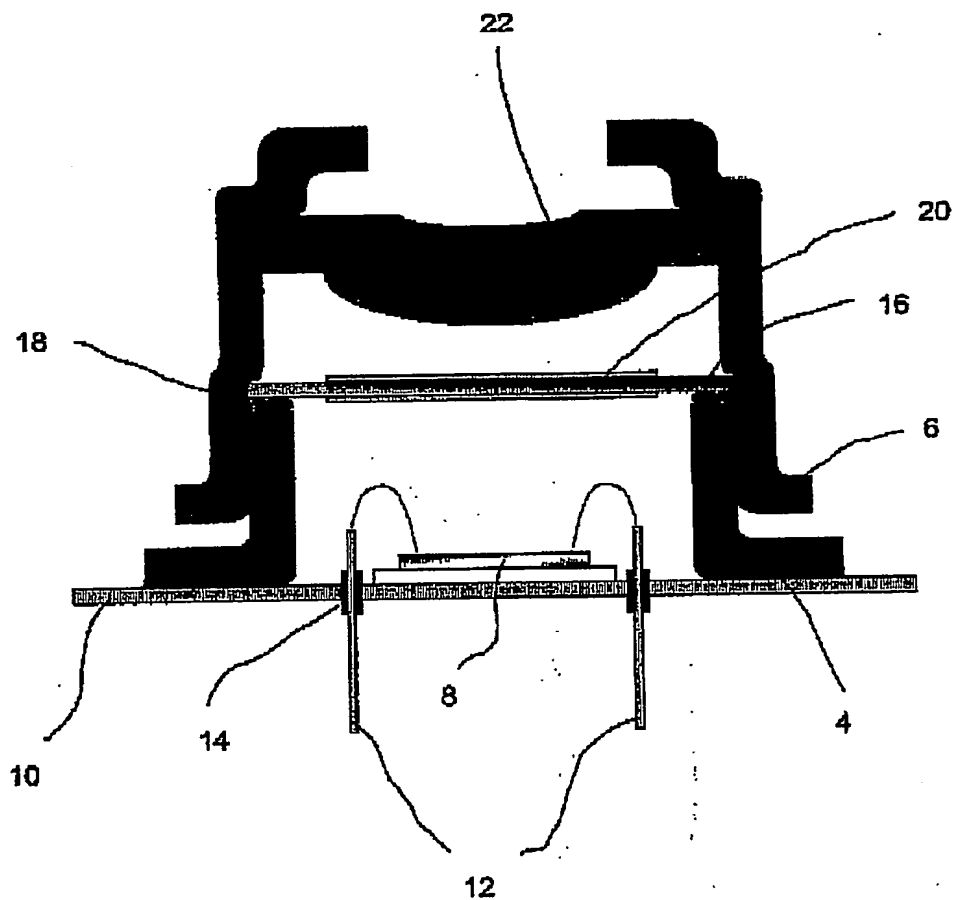


Figure 4